



**POWER  
FLUIDITY  
DURABILITY**

**6 Yd<sup>3</sup>  
8 Yd<sup>3</sup>  
10 Yd<sup>3</sup>  
12 Yd<sup>3</sup>  
14 Yd<sup>3</sup>**



**REAR LOADER  
TRACKER**

***CHAGNON***





**CHAGNON**

THE DURABAC ADVANTAGE

## Additional features & options



Centralized junction box.



2 1/2" bore with chrome rod interchangeable cylinders (4x)



Security switch when opening the access door



Stainless steel piping



Ladder and optional side guard



Single or dual Duralift Cart Tipper available with American or European grip



Tilgate locking system



Body attachment to the chassis



Safety prop for maintenance



Packer valve remotely controlled



Nylatron and UHMV wear pads on all carrier tracks are accessible from the inside of the packer body and replaceable in under 2 hours



Reversible footstep


- 9 000 lb hydraulic winch for commercial containers
- Handle extension
- (2) flashing lights located on top of the tailgate / separated switch
- (1 or 2) strobe light with cage located on the tailgate, street side (and/or sidewalk)
- One work light on each side of the body (central position). D.E.L. 1000 lumens
- Side direction lights on each side at mid-body
- Warning light and sound alarm in the cab when the tailgate is raised
- Pump installation directly on transmission PTO, FEPTO or REPTO
- Additional lever on street side
- Multiple available camera systems
- Spill kit and holder
- Fire extinguisher kit (10 or 20lbs), canvas and support
- Aluminium side guards
- Pinch point screen mesh protection located on tailgate beside the handle (MOL Ontario)
- Safety switch (palm switch)
- Central lubrication block for easy daily maintenance
- Aluminum or steel toolbox
- Splash plate in front of the body
- Extended warranty

# Specifications



MODELS	TRA 06	TRA 08	TRA 10	TRA 12	TRA 14
Capacity (yd³)	6 yd³	8 yd³	10 yd³	12 yd³	14 yd³
Unit weight	5598 lb	5797 lb	5995 lb	6198 lb	6398 lb
BODY					
Body Floor	3/16" 44 000 PSI (single sheet curved).				
Body Side Walls	11 GA				
Body Roof	10 GA				
Longitudinal reinforcements	11 GA				
Access door	Driver side				
TAILGATE					
Capacity (yd³)	1.5 yd³				
Hopper floor	3/16" 100 000 PSI QT-100				
Wall exposed section	3/16" 44 000 PSI				
Non-exposed section	10 Gauge 44 000 PSI.				
Carrier plate rail	1/4" (6,35 mm) 100 000 PSI, with replaceable wear UHMW shoes.				
Removable cover	1/16" (1.587 mm) 14 gauge.				
Side reinforcement	3/16" 44 000 PSI (single sheet) fully welded with drain holes				
Tailgate "P" seal	38" height				
Tailgate Latche	Auto-locking system.				
HYDRAULIC SYSTEM					
Pump	Gear pump				
Installation type	P.T.O.				
Pump capacity	11gpm @ 1200 rpm				
Tank	22 gal.				
Operating Pressure	2700 PSI				
Ejection/Tailgate control	Front of body/street side				

<b>SWEEP BLADE /PACKER PLATE</b>	
Cylinder bracket	3/8" 44 000 PSI
Packing face	3/16" 44 000 PSI
Blade hinge bushing	2" (50.8 mm) Aluminium bronze.
Hydraulic cylinder	2 1/2" (63.5 mm) bore with chrome rod.
<b>CARRIER PLATE</b>	
Face plate	3/16" (4,76 mm) 100 000 PSI.
Carrier plate rail	1/4" 44 000 PSI
Cylinder bracket	3/8" 44 000 PSI.
Hydraulic cylinder	2 1/2" (63.5 mm) bore with chrome rod.
<b>EJECTOR PANEL</b>	
Front	10 GA 44 000 PSI
Wear pad	UHMW, Replaceable
Ejector track	3/16" 44 000 PSI fully welded
Hydraulic cylinder	Telescopic Nitrated
<b>ELECTRIC SYSTEM</b>	
Compliance	All L.E.D.; FMWSS/CMVSS compliant.
Layout	2 Turn & stop light above hopper each side. 1 1 Turn & stop light bellow hopper each side. 1 1 License plate light above hopper. 1 Turn signal on half body each side.
<b>PERFORMANCES</b>	
Cycle time	22 seconds
Compaction rate	Std. cyl . compaction rate 450 lb (204 kg/Yd <sup>3</sup> )
<b>FINISH</b>	
Paint colour	Standard white. Sandblasted, epoxy primed with two (2) coats of acrylic enamel finish, high quality polyurethane.

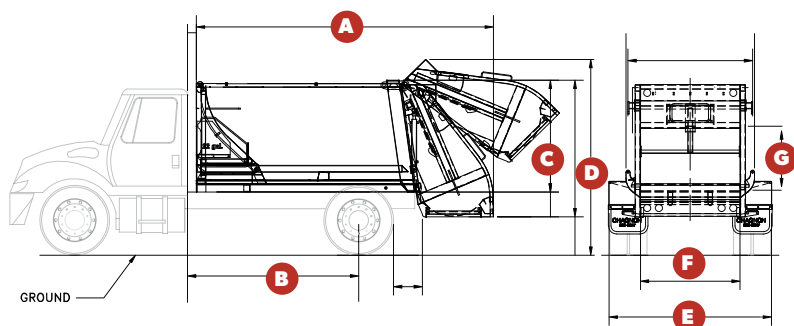

TRACKER	TRA-06	TRA-08	TRA-10	TRA-12	TRA-14
<b>A</b> Body length	247"	269"	286"	308"	318"
<b>B</b> Recommended CA	72" (95" air)	88" (101" air)	103" (116" air)	118" (131" air)	133" (146" air)
<b>C</b> Body height	79 7/8"				
<b>D</b> Overall height	117 7/8"				
<b>E</b> Overall width	97 3/4"				
<b>F</b> Hopper width (inside)	60 3/8"				
<b>G</b> Hopper opening height	41 1/4"				