



CHAGNON

**DURABILITY
POWER
SPEED**

**12,000 lb. to
65,000 lb.
CAPACITY**



**LOAD, HAUL, TOW, DUMP, SPREAD and DELIVER
anything you want!**

DLH Hook Lift Hoist Systems

www.durabac.ca



& CHAGNON



OPTIONS AND ADVANTAGES:



Jib arm engineered for durability and built from 100,000 psi steel components.



Longest jib stroke in the industry allowing you to haul more container lengths.



Maximum dump angle from 48° to 51°, depending on the model.



Low pressure hydraulics for safer operation and easier maintenance. Hoses protected by Tuff Shield.



Hold down hooker mounted directly on frame.



All bushings are greasable and easily accessible.



Interior control box with ergonomic levers and multiple options.



Optional tarping systems: manual, electric or hydraulic.



Ideal equipment for hooking platforms, dump boxes, salters, etc.



Outside control valves are a standard feature on all equipments.



Special hooklift systems built to fit your particular needs.



Can be installed by any Duralift distributor in North America or by your own crew.



DURALIFT, Durabac's hoist company!

DURALIFT conceives, designs and manufactures quality lifting and hauling equipments such as roll-off hoist systems, hook lift hoist systems, roll-off hoist trailers and associated equipment, all dedicated to the environmental industry. Every product is engineered and manufactured in North America and spare parts can easily be found in an area near you.

DURALIFT is also your first choice to meet your custom needs.

Distributed by

**Dura
Lift
CHAGNON**

divisions of
DURABAC


Telephone : 450.378.1723
Fax : 450.378.1720
Toll-free: 1.800.565.1723
22 Milton, Granby (QC) J2J 0P2
www.durabac.net

hooklift v3 rev. 10/10/2018



ENGINEERED TO LAST!

- ◆ Heavy-duty frame design with large beveled rear rollers
- ◆ Unique slide-on side rollers and body locks
- ◆ Strong sliding jib with nylatron pads
- ◆ Works with low pressure hydraulics for safety and easy on-site maintenance
- ◆ Hydraulic jib securely locked by electro safety switch
- ◆ Safer operations in dump, pick-up or drop mode
- ◆ Built under ANSI-Z245.1-2008 standards and regulations
- ◆ Highly durable, easy to install and to maintain

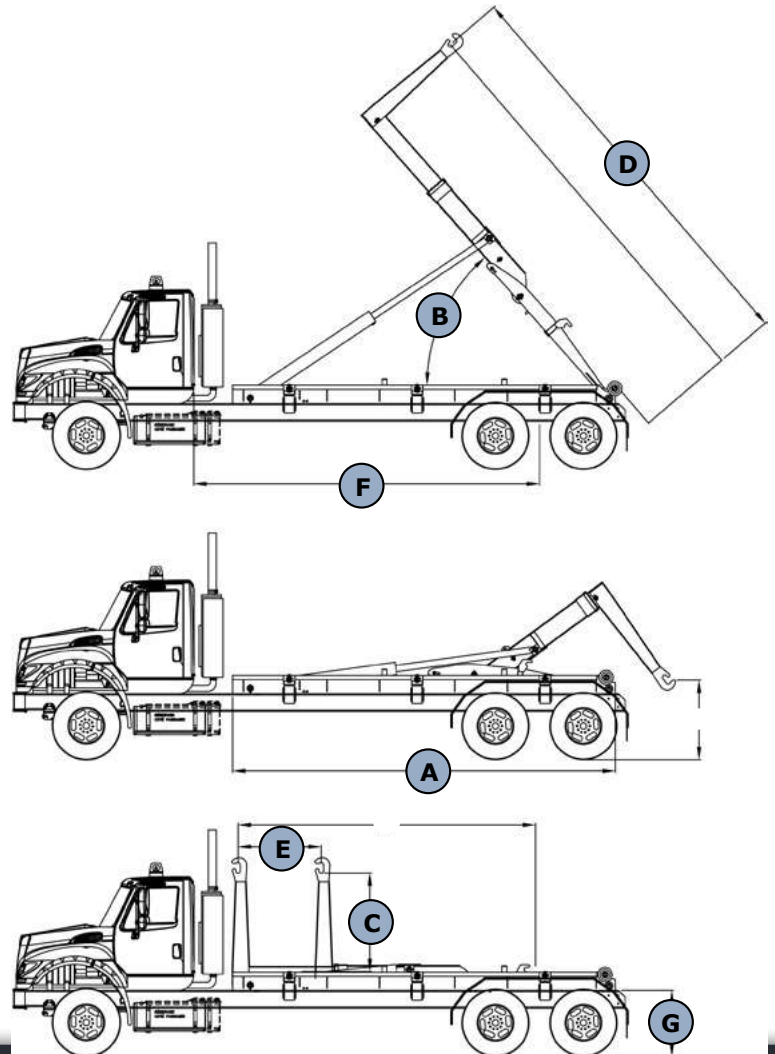

OUR HOOK-LIFT SYSTEM IS...



SAFE

In-cab control from the driver's seat, stable dual-cylinder configuration and low pressure hydraulics allow safe operation in all conditions.

PRECISE

Articulated arm, twin pivot action and increased visibility give operators more control during pick-ups, drop-offs and dump actions.

FAST

Full mounting or unmounting of load takes less than a minute.

LIGHT

Light system weight allows greater overall loading capacity.



DLH SHORT SERIES

SPECIFICATIONS		DLH - 1212	DLH - 1414	DLH - 1814	DLH - 2514
GENERAL	Lift / Dump Capacity	12,000 lb.	14,000 lb.	18,000 lb.	25,000 lb.
	Length (A)	124"	148"	148"	148"
	Dry weight	1,400 lb.	2,000 lb.	2,200 lb.	2,500 lb.
	Dump Angle (B)	52°	51°	51°	51°
	Max Operating Pressure	2,950 psi	2,950 psi	2,900 psi	2,800 psi
	Hook height (C)	36" (54" optional)	36" (54" optional)	36" (54" optional)	36" (54" optional)
	Roll-off Container length * (D)	8 to 12'	9 to 14'	9 to 14'	9 to 14'
Main Cylinders	Quantity	2	2	2	2
	Stroke	40"	50"	50"	50"
	Bore	4" / 2"	4.5" / 2"	5.5" / 2.25"	6" / 2.5"
Jib Cylinder	Stroke (E)	28"	30"	30"	30"
	Bore	2.5" / 1.5"	3" / 1.5"	3" / 1.5"	3.5" / 1.75"
Truck Specs	GVW	18,000 to 25 000 lb.	18,000 to 25,000 lb.	22,000 to 35,000 lb.	30,000 to 39,000 lb.
	CA (F)	100 to 110"	100 to 120"	100 to 120"	100 to 120"
	Clear frame rail	124"	148"	148"	148"
	Frame height (G)	40"max	45" max	45" max	45" max

DLH MID SERIES

SPECIFICATIONS		DLH - 2520	DLH - 3518	DLH - 4018	DLH - 4020	DLH-4022
GENERAL	Lift / Dump Capacity	25,000 lb.	35,000 lb.	40,000 lb.	40,000 lb.	40,000 lb.
	Length (A)	216"	196"	196"	216"	240"
	Dry weight	4,100 lb.	4,400 lb.	4,800 lb.	5,200 lb.	5,375 lb.
	Dump Angle (B)	50°	51°	51°	50°	50°
	Max Operating Pressure	2,750 psi	2,750 psi	2,750 psi	2,750 psi	2,750 psi
	Hook height (C)	61 3/4"	61 3/4"	61 3/4"	61 3/4"	61 3/4"
	Roll-off Container length * (D)	14 to 20'	12 to 18'	12 to 18'	14 to 20'	16 to 22'
Main Cylinders	Quantity	2	2	2	2	2
	Stroke	72"	60"	60"	72"	80"
	Bore	5" / 2.5"	6" / 3"	6.5" / 3.5"	6.5" / 3.5"	6.5" / 4"
Jib Cylinder	Stroke (E)	48"	40"	40"	48"	52"
	Bore	4" / 2"	4" / 2.25"	4" / 2.25"	4" / 2.25"	4" / 2.25"
Truck Specs	GVW	30,000 to 39,000 lb.	45,000 lb. and over	45,000 lb. and over	45,000 lb. and over	45,000 lb. and over
	CA (F)	154 to 170"	130 to 144"	130 to 144"	154 to 170"	175 to 190"
	Clear frame rail	228"	196"	196"	228"	240"
	Frame height (G)	45" max	45" max	45" max	45" max	45" max

DLH LONG SERIES

SPECIFICATIONS		DLH-5020	DLH - 5022	DLH - 6022	DLH - 6524
GENERAL	Lift / Dump Capacity	50,000 lb.	50,000 lb.	60,000 lb.	65,000 lb.
	Length (A)	216"	240"	240"	260"
	Dry weight	5,250 lb.	5,675 lb.	6,350 lb.	7,575 lb.
	Dump Angle (B)	50°	50°	50°	50°
	Max Operating Pressure	2,750 psi	2,750 psi	2,500 psi	2,750 psi
	Hook height (C)	61 3/4"	61 3/4"	61 3/4"	61 3/4"
	Roll-off Container length * (D)	14 to 20'	16 to 22'	16 to 22'	18 to 24'
Main Cylinders	Quantity	2	2	2	2
	Stroke	72"	80"	80"	88"
	Bore	6.5" / 3.5"	7" / 4"	8" / 4"	8" / 4"
Jib Cylinder	Stroke (E)	48"	52"	52"	56"
	Bore	5" / 2.5"	5" / 2.5"	6" / 3"	6" / 3"
Truck Specs	GVW	45,000 lb. and over	60,000 lb. and over	60,000 lb. and over	60,000 lb. and over
	CA (F)	154 to 170"	175 to 190"	175 to 190"	190 to 210"
	Clear frame rail	228"	240"	240"	264"
	Frame height (G)	45" max	45" max	45" max	45" max



CHAGNON

divisions of **DURABAC**